




# DVT-20 / DVT-30 Heating Cable

## General Purpose Heating Cable

- Floor Heating
- Snow and Ice Melting
- Drain and Gutters
- Frost Protection Pipes
- Freezer Room Floors

### Construction:

- Twin conductor Heating Cable
- 20 Watt or 30 Watt per Linear Metre
- Stranded Wire Heating Conductor
  - Long Life Teflon Insulation
  - Braided Return Wire
- Braided Earth Shielding of Tin Plated Copper
  - Strong PVC Outer Jacket
  - Nominal Diameter: 6mm
- Symmetrical Cable Construction - Easy to Bend
  - Applied Standard: IEC 800

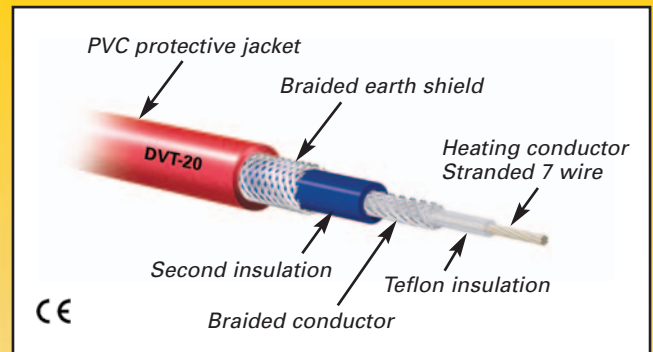

Product Code	Cable length in metres	Power in watts
FHSC20 - 240	12m	240w
FHSC20 - 400	20m	400w
FHSC20 - 500	25m	500w
FHSC20 - 600	30m	600w
FHSC20 - 800	40m	800w
FHSC20 - 1000	50m	1000w
FHSC20 - 1200	60m	1200w
FHSC20 - 1400	70m	1400w
FHSC20 - 1600	80m	1600w
FHSC20 - 2000	100m	2000w
FHSC20 - 2400	120m	2400w
FHSC20 - 3000	150m	3000w
FHSC30 - 1000	32m	1000w
FHSC30 - 1400	48m	1400w
FHSC30 - 2500	80m	2500w
FHSC30 - 3500	129m	3500w